



## Internet Camera Server TV-IP110

The Internet Camera Server (TV-IP110) transmits real-time high quality video over the Internet. View your camera from any Internet connection. Complimentary SecurView camera management software provides advanced monitoring of up to 16 cameras to protect what you value most.

This stylish and compact Internet camera provides crystal clear MJPEG video streams.

Mount the camera on most surfaces with an included mounting kit. Intuitive software features motion detection recording, email alerts, and scheduled recordings. The camera's brilliant image quality, intuitive setup and complimentary software make it ideal for your home or office.

## FEATURES

- Supports TCP/IP networking, SMTP Email, HTTP, Samba and other Internet protocols
  - High quality MJPEG video recording with up to 30 frames per second
  - Record streaming video to your computer
  - Supports still image snapshot to FTP and Email
  - Motion detection with Email notification
  - Supports two adjustable motion detection windows with just-in-time snapshot
  - Embedded Watchdog feature automatically reboots camera if an operational errors is detected
  - Supports time stamp overlay
  - Quick Universal Plug and Play installation
  - Free SecurView™ software: view and record up to 16 cameras simultaneously \*
  - 3-year warranty
- \* Monitoring multiple cameras will require a high performance CPU and graphics card

# Internet Camera Server

## TV-IP110

### SPECIFICATIONS

Image Sensor	
Sensor	• 1/4" Color CMOS Sensor
Resolution	• 640 x 480 pixel
Fixed Lens	• f: 4.6mm, F: 2.6 (Board Lens)
Viewing Angle	• 60 Degree
Minimum Illumination	• 0.5Lux
Video/Image	
Video Format	• MJPEG
Image Frame Rate	• 30fps @VGA, QVGA, QQVGA
Frame Rate Setting	• 1 ~ 30fps, 3 x Digital Zoom
Zoom	• 3 x Digital Zoom
Compression Ration Setting	• 5 Levels
Resolution	• 640 x 480, 320 x 240, 160 x 120
Exposure Control, White Balance, Gain Control	• Automatic
Image Setting	• Adjustable brightness, contrast, saturation
Flip Images	• Vertical / Horizontal
Light Frequency	• 50Hz, 60Hz or Outdoor
Communication	
LAN	• 10/100Mbps Auto MDIX
Protocol	• HTTP, FTP, TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, PPPoE, UPnP
System	
CPU	• ARM9 base
RAM	• 16Mbyte SDRAM
ROM	• 4Mbyte Nor Flash
OS	• Linux
System Requirement (Web Configuration)	
CPU	• Pentium 4, 350MHz or above
Memory Size	• 256MB RAM or above, 512MB RAM or above (Windows Vista)
Resolution	• 800 x 600 or above
Browser	• Internet Explorer 6.0 or above
Supported OS	• Windows 2000/XP/Vista
System Requirement (SecurView™ Software)	
CPU	• Pentium 4, 1GHz or above
Memory Size	• 512MB or above
Resolution	• 1024 X 768 or above
Supported OS	• Windows 7 (32/64-bit), Vista (32/64-bit), XP (32/64-bit)




# Internet Camera Server TV-IP110

## SPECIFICATIONS

Physical/Environmental	
Dimension	• 70 x 100 x 57mm (2.67 x 3.94 x 2.95 in.)
Weight	• Camera: 125g (4.4oz.); Stand: 135g (4.76oz.)
Power	• 5V DC, 2.5A External Adapter
Power Consumption	• 6 Watts (Max)
LEDs	• Power (Orange), Link (Green) • Enable/Disable Support
Temperature	• Operating: 0°C ~ 45°C (32°F ~ 113°F); Storage : -10°C ~ 60°C (14°F ~ 140°F)

## NETWORKING SOLUTIONS

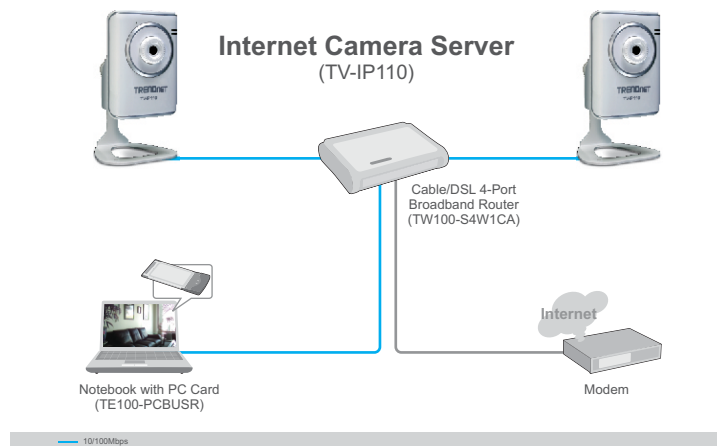

## PACKAGE CONTENTS

- TV-IP110
- Utility CD-ROM
- Multi-Language Quick Installation Guide
- 1.8m/5.9ft Cat.5 Fast Ethernet cable
- Power Adapter (5V DC 2.5A)
- Camera Stand

## RELATED PRODUCTS

TV-IP110W	Wireless Internet Camera Server
TV-IP212	2-Way Audio Internet Camera Server
TV-IP312	2- Way Audio Day/Night Internet Camera Server

## ORDERING INFORMATION

### TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: [www.trendnet.com](http://www.trendnet.com)

Email: [sales@trendnet.com](mailto:sales@trendnet.com)

To Order Please Call:

**1-888-326-6061**