

DH-SD59212S/220S/230S-HN

2Mp Full HD 12x/20x/30x Network IR PTZ Dome Camera



Features

- 12x/20x/30x optical zoom
- Support dual-streams encoding
- Max. 25/30fps@1080P(1920×1080) & 50/60fps@720P resolution
- DWDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- Max 400°/s pan speed, 360° endless pan rotation
- Up to 300 presets, 5 auto scan, 8 tour, 5 pattern
- Built-in 2/1 alarm in/out
- Support intelligent 3D positioning with DH-SD protocol
- Micro SD memory, IP66, POE+
- IR Distance up to 100m(AC24V)/ 80m(DC12V)

DH-SD59212S/220S/230S-HN

Technical Specifications


Model	DH-SD59212S-HN	DH-SD59220S-HN	DH-SD59230S-HN
Camera			
Image Sensor	1/2.8" CMOS		
Effective Pixels	1944(H) x 1092(V), 2Megapixels		
Scanning System	Progressive		
Electronic Shutter Speed	1/3 ~ 1/30,000s		
Min. Illumination	Color: 0.05Lux@F1.6; B/W: 0.005Lux@F1.6, 0Lux (IR on)		
S/N Ratio	More than 55dB		
Camera Features			
Day/Night	Auto(ICR) / Color / B/W		
Backlight Compensation	BLC / HLC / DWDR (Digital WDR)		
White Balance	Auto, ATW, Indoor, Outdoor, Manual		
Gain Control	Auto / Manual		
Noise Reduction	Ultra DNR (2D/3D)		
Privacy Masking	Up to 24 areas		
Digital Zoom	16x		
Lens			
Focal Length	5.1mm~61.2mm (12x Optical zoom)	5.5mm ~ 110.0mm (20x Optical zoom)	4.3mm~129mm (30x Optical zoom)
Max Aperture	F1.6~ F3.0	F1.6 ~ F3.5	F1.6~ F5.0
Focus Control	Auto / Manual		
Angle of View	H: 51.3° ~ 4.64°	H: 51° ~ 2.60°	H: 65.1° ~ 2.34°
Close Focus Distance	100mm~ 1000mm		
PTZ			
Pan/Tilt Range	Pan: 0° ~ 360° endless; Tilt: -15° ~ 90°, auto flip 180°		
Manual Control Speed	Pan: 0.1° ~300° /s; Tilt: 0.1° ~200° /s		
Preset Speed	Pan: 400° /s; Tilt: 300° /s		
Preset	300		
PTZ Mode	5 Pattern, 8 Tour, Auto Pan, Auto Scan		
Speed Setup	Human-oriented focal length/ speed adaptation		
Power up Action	Auto restore to previous PTZ and lens status after power failure		
Idle Motion	Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period		
IR Distance	80m (DC12V) 100m (AC24V)		
Video			
Compression	H.264 / MJPEG		
Resolution	1080P(1920×1080)/ 720P(1280×720) / D1(704×576/ 704×480) /CIF (352×288/352×240)		
Frame Rate	Main Stream	1080P/ D1 (1 ~ 25/30fps), 720P(1~50/60fps)	

DH-SD59212S/220S/230S-HN

	Sub Stream 1	D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 448K ~ 8192Kbps, MJPEG: 5120K ~ 10240Kbps	
Audio		
Compression	G.711a / G.711Mu(32kbps)/ PCM(128kbps)	
Interface	1/1 channel In/Out	
Network		
Ethernet	RJ-45 (10/100Base-T)	
Protocol	IPv4/ IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x	
Compatibility	ONVIF PSIA CGI	
Max. User Access	20 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	
Auxiliary Interface		
Memory Slot	Micro SD, Max 64GB	
Alarm	2/1 channel In/Out	
General		
Power Supply	AC24V/ DC12V, POE plus(802.3at)	
Power Consumption	DC12V: 13W, 20W (IR on) AC24V: 13W, 23W (IR on)	
Working Environment	DC12V: -30°C ~ 60°C / Less than 90% RH AC24V: -40°C ~ 70°C / Less than 90% RH	
Ingress Protection	IP66	
Dimensions	Φ186.0(mm) x 309(mm)	
Weight	3.5kg	

DH-SD59212S/220S/230S-HN

Dimensions (mm)

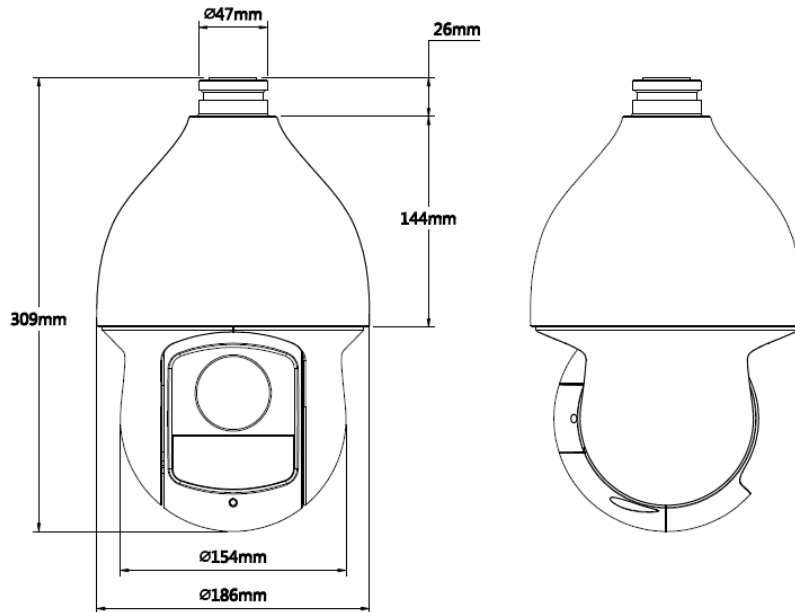

Accessories

		
DH-PFB300S	DH-PFA110	Power Supply

DH-SD59212S/220S/230S-HN

Accessories (Optional)

						
DH-PFB3 00C	DH-PFA112	DH-PFA113	DH-PFB301S	DH- PFA120	DH-PFA150	DH-PFA151

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology