


## Gigabit PCI Network Adapter TG-3269

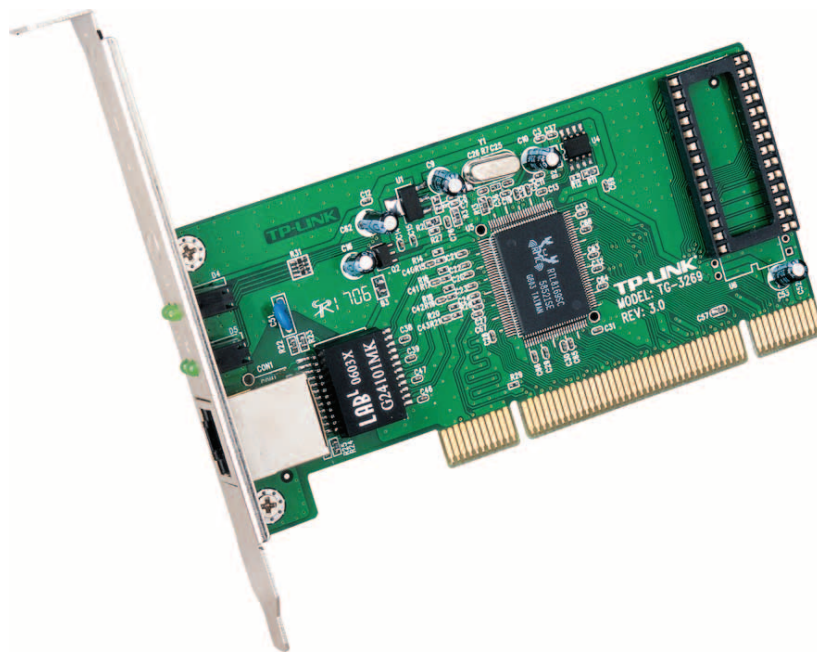

10/100/1000M PCI Adapter

Complies with  
IEEE 802.3/802.3u/802.3ab  
Ethernet Standard

Easy installation,  
sports drivers  
for most popular OS




### Description:

TG-3269 is a 10/100/1000Mbps, 32-bit 33/66MHz PCI-bus Gigabit Ethernet adapter. With single UTP/STP and the Auto-Negotiation (Nway) function support, the Card can auto-negotiate 10Mbps, 100Mbps or 1000Mbps speed, and half or full duplex mode with its link partner (a hub, for example). Supports ACPI, compliant with PCI2.2. Full range of drivers are provided for major Operating Systems

## Specifications:

|                         |   |
|-------------------------|---|
| Standards and Protocols | IEEE 802.3, 802.3u, 802.3ab, 802.3x, 802.1q, 802.1p<br>CSMA/CD, TCP/IP, PCI Revision 2.1/2.2  |
| Interface               | 32-bit PCI  |
| Transmission Rate       | 10/100Mbps for Half-Duplex mode<br>20/200/2000Mbps for Full-Duplex mode   |
| Flow Control            | IEEE 802.3x Flow Control (Full-Duplex)  |
| Jumbo Frame             | 7680Bytes   |
| Port                    | 10/100/1000Mbps RJ45  |
| Slot                    | 1 BOOTROM slot  |
| Network Media           | 10BASE-T: UTP category 3, 4, 5 cable (maximum 100m)<br>EIA/TIA-568 1000 STP (maximum 100m)<br>100BASE-TX: UTP category 5, 5e cable (maximum 100m)<br>EIA/TIA-568 1000 STP (maximum 100m)<br>1000Base-T: UTP category 5, 5e cable (maximum 100m) |
| LED Indicator           | 1000M Link/Act, 100M Link/Act, 10 Link/Act, Duplex  |
| Safety & Emission       | FCC, CE<br>Operating Temperature: 0°C~40°C (32°F~104°F)<br>Storage Temperature: -40°C~70°C (-40°F~158°F)  |
| Environment             | Operating Humidity: 10%~90% non-condensing<br>Storage Humidity: 5%~90% non-condensing   |
| Operating System        | Windows 7/Vista/XP/2000, Linux  |

## Diagram:

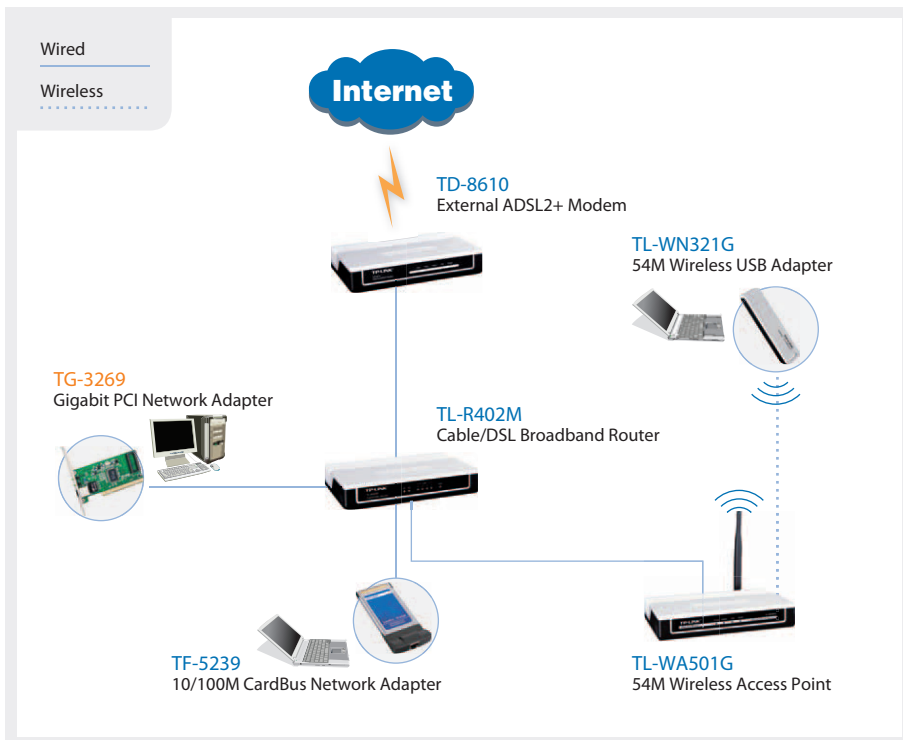

## Features:

- Supports 32-bit 33/66MHz PCI Bus
- Supports 10/100/1000Mbps Nway Auto-Negotiation
- Supports 10/100Mbps full and half duplex, 1000Mbps full duplex
- Supports Full Duplex Flow Control (IEEE 802.3x)
- Supports IEEE 802.1P, IEEE 802.1Q VLAN tag
- Supports Jumbo Frame
- Supports Auto-MDI/MDIX
- Provides Bootrom slot, supporting remote boot
- Supports ACPI, PCI power management
- Contain two large independent receive and transmit FIFOs
- One STP/UTP connector
- Provides LEDs to indicate network Link/Activity/Speed/Duplex
- Plug and Play

## Package:

- Gigabit PCI Network Adapter TG-3269
- One Resource CD , including:
  - Drivers
  - User Guide
  - Other Helpful Information

## Related Products:

- External ADSL2+ Modem TD-8610
- 54M Wireless Access Point TL-WA501G
- 54M Wireless USB Adapter TL-WN321G
- Cable/DSL Broadband Router TL-R402M

Specifications are subject to change without notice. TP-LINK is a registered trademark of TP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies Co., Ltd.