

# VTH5221D/DW-C

## Wi-Fi Indoor Monitor



### Technical Specification

|                       |                                     |
|-----------------------|-------------------------------------|
| Model                 | VTH5221D/DW-C                       |
| <b>System</b>         |                                     |
| Main Processor        | Embedded Micro Processor            |
| Operation System      | Embedded LINUX OS                   |
| <b>Video</b>          |                                     |
| Video Compression     | H.264                               |
| Image Sensor          | 1/4" 1MP CMOS                       |
| Lens                  | 2.2mm                               |
| Angle of View         | D:125° H:105°                       |
| <b>Audio</b>          |                                     |
| Audio Compression     | G.711                               |
| Audio Input           | All-direction Microphone            |
| Audio Output          | Built-in Loudspeaker                |
| Bidirectional Talk    | Support Dual-way Bidirectional talk |
| <b>Display</b>        |                                     |
| LCD Screen            | 7" 1024x600, Capacitive             |
| <b>Operation Mode</b> |                                     |
| Input                 | Touch buttons                       |
| <b>Interface</b>      |                                     |
| Alarm In              | 6                                   |
| Alarm Out             | 1                                   |
| RS485                 | 1                                   |

### Features

- 7" TFT Capacitive touch screen, 1024x600
- IPC surveillance
- Alarm integration
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)




### Network

|                  |                           |
|------------------|---------------------------|
| Wi-Fi            | IEEE802.11b/g/n           |
| Ethernet         | 10M/100Mbps Self-adaptive |
| Network Protocol | TCP/IP                    |


### General

|                     |                        |
|---------------------|------------------------|
| Memory Slot         | Micro SD, Max 32GB     |
| Installation        | Surface                |
| Power               | DC 12V, PoE (802.3af)  |
| Power Consumption   | Standby ≤1W, Work ≤7W  |
| Working Temperature | -10°C~+55°C            |
| Relative Humidity   | 10%~90%RH              |
| Dimensions          | 215.0mm×140.0mm×21.0mm |
| Weight              | 0.8Kg                  |

Dimensions

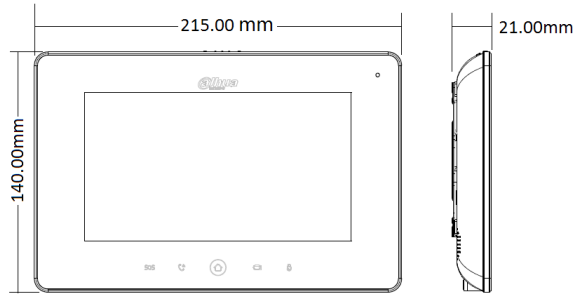

View Area

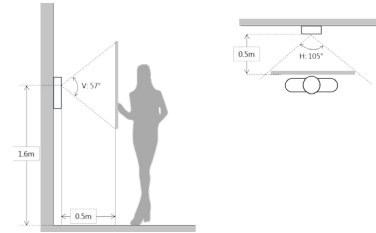

Application

