

# DHL55-4K

## 55" UHD LCD Monitor



### Features :

- 4K ultra-HD resolution
- Industrial level DID LCD panel, suitable for extensive 7×24 continuous works
- High fidelity digital processing, brilliant and vivid video
- Built-in 3D COMB filter and 3D Noise Reduction
- 8ms fast response time, no image ghosting
- 16.7M color, display every details of video
- Brightness smart detection, power-saving
- Using Tamper-proof metal housing, no radiation
- Professional thermal design to extend equipment lifespan
- Built-in power, low energy consumption, ultra-quiet
- Abundant interfaces HDMI, DVI, VGA, BNC, USB, support video loop

### Technical Specification

#### Model

Model	DHL55-4K
-------	----------

#### System

Diagonal	54.6"(16:9)
Resolution	3840×2160 (UHD)
Backlight	LED
Brightness/Luminance (Standard)	500 cd/ m <sup>2</sup>
Contrast	1100:1
Angle of view	178°/178°(vertical/horizontal)
Response time	8ms

#### Signals

Input	standard	VGA(D-Sub)×1, CVBS(BNC)×1, DVI-D×1, HDMI×2, RS232×1, USB multimedia×1
	optional	Audio×1, RJ45×1, HDCVI×1, SDI×1, DP×1
Output	Standard	Audio×1, RS232×1
	optional	DP×1

#### General

Consumption (Standard)	80W
Consumption (Standby)	≤1W





Power Supply	AC100~240V (+/-10%),50/60 Hz
Weight	26.5kg
Dimensions(no base)	1263.1×743.9×51.9mm
Work Environment	Temperature:0°~50°
	Humidity:20%~90%
VESA	300×300mm

#### Accessory

Standard	VGA cable, power cable
Optional	Pedestal, hanging bracket

**Dimensions(mm)**

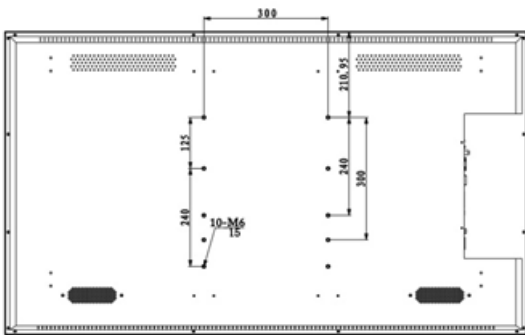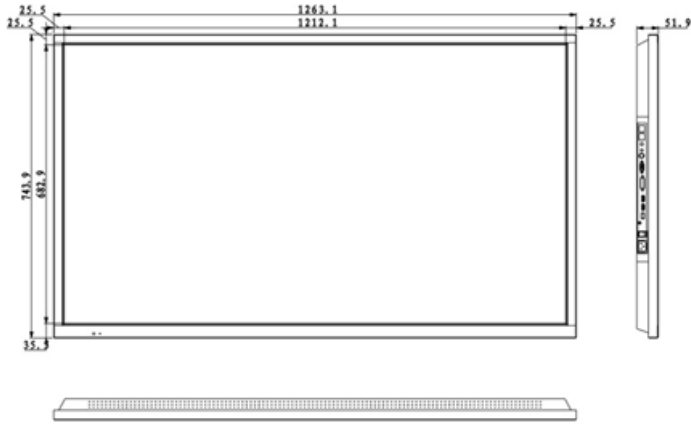

AC100 - 240V 1.2A 50/60 HZ	ON										
AC IN	OFF										
	<input type="checkbox"/>		HDMI 1	HDMI 2	DVI-D	VGA	CVBS	AUDIO-IN	AUDIO-OUT	LAN in	LAN out