

# DHI-TPC-BF5441-AC

## Thermal Network Anti-corrosion Hybrid Bullet Camera



- Vanadium oxide uncooled focal plane detector.
- 1/1.8" 4Megapixel progressive scan CMOS.
- Heat detection and alarm, tripwire, intrusion, and target filtering.
- Illumination distance is up to 80 m.
- IP67 rated.
- Wide input voltage 12 VDC  $\pm$  20%, and PoE power supply.
- Smart linkage of white light and audio.
- Anti-corrosion

Featuring thermal and visible channels, Thermal Network Anti-corrosion Hybrid Bullet Camera offers various AI functions such as heat detection, smoke detection, tripwire, intrusion, and human/vehicle classification. The camera is applied in outdoor scenes of the medium-distance perimeter protection and heat detection. With the anti-corrosion coating, the camera can be used in scenes where anti-corrosion is required, such as coasts, ports, coastal cities.

### Technical Specification

#### Thermal

Detector Type	Vanadium oxide uncooled focal plane detector
Effective Pixels	400 (H) $\times$ 300 (V)
Pixel Pitch	17 $\mu$ m
Spectral Range	8 $\mu$ m–14 $\mu$ m
Sensitivity (NETD)	$\leq$ 35 mK (@f/1.0)
Field of View	13 mm: H:30.4°; V: 22.5° 25 mm: H:15.5°; V: 11.6° 35 mm: H:11.1°; V: 8.3°
Thermal Focus Control	Fixed-focal
Close Focus Distance	13 mm: 2.9 m (9.51 ft) 25 mm: 9 m (29.53 ft) 35 mm: 36 m (118.10 ft)
Digital Detail Enhancement (DDE)	Yes
Digital Zoom	19 levels
Thermal AGC	Auto/Manual
Thermal Noise Reduction	2D NR/3D NR
Image Flip	180°; Mirror
Color Palettes	18 (white hot/black hot/fusion/rainbow/golden autumn/midday/iron red/amber/jade/sunset/icefire/painting/pomegranate/emerald /spring/summer/autumn/winter)

#### Visible

Image Sensor	1/1.8" CMOS
Max. Resolution	2688 (H) $\times$ 1520 (V)
Pixel	4 MP
Horizontal Definition	$\geq$ 1100 TVL
Min. Illumination	Color: 0.01 lux Black & white: 0.001 lux 0 lux (white light on)
Visible AGC	Auto/Manual
Visible Noise Reduction	2D NR/3D NR
S/N Ratio	>55 dB
White Balance	Auto; manual; indoor; outdoor; tracking; sodium lamp; street lamp; natural
Defog	Electronic defog
Electronic Shutter Speed	1 s–1/30,000 s (auto/manual)
BLC	Yes
WDR	Yes
HLC	Yes
Day/Night	Auto (ICR); Color; B/W
Iris Control	Fixed
Image Flip	180°; Mirror
Exposure Compensation	Yes

Visible Focus Control	Fixed-focal
Field of View	6 mm: H: 55.3°; V: 30.0° 12 mm: H: 37.3°; V: 21.4° 10–30 mm: H: 42°–15°; V: 23°–8.4°
Close Focus Distance	6 mm: 2.5 m (8.20 ft) 12 mm: 7.4 m (24.27 ft) 10–30 mm: 9 m (29.53 ft)
Aperture	6 mm: F1.6 12 mm: F1.7 10–30 mm: F1.7
Illuminator On/Off Control	Auto; manual
Illumination Distance	80 m (262.47 ft)

## Audio and Video

Video Compression	H.265; H.264M; H.264H; H.264B
Resolution	Thermal: Main stream: 1280 × 1024; 1280 × 960; 1280 × 720; 400 × 300; 1280 × 960 (default) Sub stream: 640 × 512; 640 × 480; 400 × 300; 400 × 300 (default) Visible: Main stream: 2688 × 1520; 2560 × 1440; 1920 × 1080; 1280 × 720; 704 × 576; 2560 × 1440 (default) Sub stream: 704 × 576; 352 × 288; 704 × 576 (default)
Video Frame Rate	Thermal (50 Hz): Main stream: 1 fps–25 fps, 25 fps by default Sub stream: 1 fps–25 fps, 15 fps by default Visible (50 Hz): Main stream: 1 fps–25 fps, 25 fps by default Sub stream: 1 fps–25 fps, 15 fps by default Thermal (60 Hz): Main stream: 1 fps–30 fps, 30 fps by default Sub stream: 1 fps–30 fps, 15 fps by default Visible (60 Hz): Main stream: 1 fps–30 fps, 30 fps by default Sub stream: 1 fps–30 fps, 15 fps by default
Audio Compression	G.711a; G.711 mu
Image Encoding Format	JPEG

## Function

Two-way Audio	Yes
Sound and Light Alarm	Local audio and white light alarm prompts
Network Protocol	IPv4/IPv6; HTTP; HTTPS; 802.1x; QoS; FTP; SMTP; UPnP; SNMP; DNS; DDNS; NTP; RTSP; RTP; TCP; UDP; IGMP; ICMP; DHCP; PPPoE
Region of Interest (RoI)	Yes (customizable)
Storage	FTP; Micro SD card (512 GB, hot swapping)
Interoperability	ONVIF; CGI; DaHua SDK
Browser	IE; Firefox; Chrome; Safari
User/Host	Up to 20 (total bandwidth: 64 MB)
Security	Authorized username and password; attached MAC address; encrypted HTTPS; IEEE 802.1x; controlled network access
User Management	Up to 20 users; supports multi-level user permissions (2 levels): management group and user group
Malfunction Detection	Network disconnection detection; IP conflict detection; memory card state detection; memory space detection

Fusion Mode	Yes. Off by default
PIP	Yes

## Intelligence

Heat Detection	Yes
Cold/Hot Spot Trace	Yes
Perimeter Protection	Yes. Supports tripwire and intrusion.
Target Distinction	Human/Vehicle Classification
Target Tracking	Yes
Smoke Detection	Yes

## Port

Analog Output	1 × CVBS output; BNC port (not supported by the device with a junction box)
Network Port	1 × RJ-45 (10/100 Base-T)
Alarm Input	2
Alarm Output	2
Audio Input	1
Audio Output	1
RS-485	1

## Power

Power Supply	12 VDC ± 20%, PoE (802.3af), ePoE
Power Consumption	Basic: 5 W (illuminator off, heater off, speaker off) Max: 15 W (illuminator on, heater on, speaker on)
ePoE	Yes

## Environment

Operating Temperature	–30 °C to +70 °C (–22 °F to +158 °F)
Operating Humidity	≤95%
Storage Temperature	–40 °C to +70 °C (–40 °F to +158 °F)

## Physical Characteristics

Protection	IP67
Reliability	Surge protection: 6 kV Air discharge: 8 kV Contact discharge: 6 kV

## Structure

Product Dimensions	300.9 mm × 130.2 mm × 120.1 mm (11.85" × 5.13" × 4.73") (L × W × H)
Packaging Dimensions	423 mm × 180 mm × 178 mm (16.65" × 7.09" × 7.01") (L × W × H)
Net Weight	≤2.35 kg (5.18 lb)
Gross Weight	≤2.7 kg (5.95 lb)
Lens	Included

## Certification

Certifications	CE/FCC
----------------	--------

Heat Detection Distance

Focal Length	Max. Distance
13 mm	114 m (374.02 ft)
25 mm	219.3 m (719.49 ft)
35 mm	307 m (1,007.21 ft)

Note:  
The table displays the measured distances obtained from using the target size 0.2 m × 0.2 m for testing in an environment where the temperature is 23 °C and the relative humidity is below 60%.  
The table is for reference only. The distances within it are subject to actual conditions including atmospheric conditions, target size, the installation site, and more.

Perimeter Protection Distance (IVS Distance)

Focal Length	Distance (Vehicle)	Distance (Human)
13 mm	312 m (1,023.62 ft)	104 m (341.21 ft)
25 mm	600 m (1,968.50 ft)	200 m (656.17 ft)
35 mm	840 m (2,755.90 ft)	280 m (918.64 ft)

Note:  
The table displays the measured distances obtained from using the target sizes 1.8 m × 0.5 m (human) and 1.4 m × 4 m (vehicle) for testing in an environment where the temperature is 23 °C and the relative humidity is below 60%.  
The table is for reference only. The distances within it are subject to actual conditions including atmospheric conditions, target size, the installation site, and more.

DRI Distance

Focal Length	Detection Distance <sup>①</sup>	Recognition Distance <sup>②</sup>	Identification Distance <sup>③</sup>
13 mm	Vehicle: 1,173 m (3,848.43 ft); Human: 382 m (1,253.28 ft)	Vehicle: 293 m (961.29 ft); Human: 96 m (314.96 ft)	Vehicle: 147 m (482.28 ft); Human: 48 m (157.48 ft)
25 mm	Vehicle: 2,255 m (7,398.29 ft); Human: 735 m (2,411.42 ft)	Vehicle: 564 m (1,850.39 ft); Human: 184 m (603.67 ft)	Vehicle: 282 m (925.20 ft); Human: 92 m (301.84 ft)
35 mm	Vehicle: 3,157 m (10,357.61 ft); Human: 1,029 m (3,375.98 ft)	Vehicle: 789 m (2,588.58 ft); Human: 257 m (843.18 ft)	Vehicle: 395 m (1,295.93 ft); Human: 129 m (423.23 ft)


- ① Detection Distance: Detects objects, but cannot recognize their characteristics (objects must cover more than 1.5 pixels of the image).
- ② Recognition Distance: Classifies objects into general categories, such as human, vehicle (the object must cover more than 6 pixels of the image).
- ③ Identification Distance: Classifies objects into specific categories based on their characteristics, such as engineering truck, car (the object must cover more than 12 pixels of the image).

Note:  
The table is the standard theoretical calculation and is for reference only. The distances within it are subject to actual conditions including atmospheric conditions, target size, the installation site, and more. For the intelligent detection distance, refer to the table of Perimeter Protection Distance (IVS Distance) above.

Ordering Information		
Type	Model	Description
Security	DHI-TPC-BF5441-B13F6-BM-AC-S2	Thermal: 13 mm; Visible: 6 mm
	DHI-TPC-BF5441-B25F12-BM-AC-S2	Thermal: 25 mm; Visible: 12 mm
	DHI-TPC-BF5441-B35Z3-BM-AC-S2	Thermal: 35 mm; Visible: 10mm-30 mm
Accessories (Optional)	PFA151A + PFA121A	Corner Mount Bracket
	PFA121A	Junction Mount
	PFA155A + PFA121A	Vertical Pole Mount Bracket

Accessories

Optional:

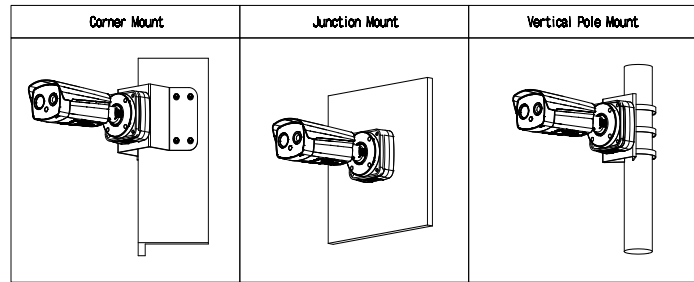

Dimensions (mm[inch])

