


# VTK-VTO6210BW-VTH1550CH

## 7 Inch IP Kit

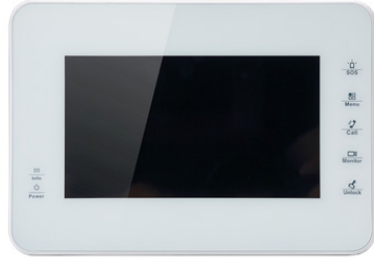

### Technical Specification

#### Video Outdoor Station

Model	VTO6210BW
-------	-----------

#### System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

#### Video

Video Compression	H.264
Image Sensor	1/4" 1MP CMOS
Lens	3.6mm
Angle of View	D:70° H:60°
Day/Night	Color Image

#### Audio

Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk

#### Operation Mode

Keypad	Single Touch Button
Reader	Mifare Card

#### Interface

Door Control	2(1 relay out for main lock, 1 extended by access control module)
Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1

#### Network

Ethernet	10M/100Mbps Self-adaptive
----------	---------------------------

### Features

- HD CMOS camera
- 7-inch capacitive touch screen, resolution 800×480
- IPC surveillance
- Alarm integration
- 2-Door control
- Remote intercom with mobile APP



Network Protocol	TCP/IP
------------------	--------

#### General

Ingress Protection	IP65
Tamper Switch	1
Installation	Surface
Material	Tempered Glass
Power	DC 12V, or supply directly by VTNS1060A
Power Consumption	Standby ≤1W, Work ≤10W
Working Temperature	-30°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	154.2mm×114.2mm×43.0mm
Weight	0.6Kg

#### Video Indoor Monitor

Model	VTH1550CH
-------	-----------

#### System

Main Processor	Embedded Micro Process
Operation System	Embedded LINUX OS

#### Video

Video Compression	H.264
-------------------	-------

#### Audio

Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk

#### Display

# VTK-VTO6210BW-VTH1550CH

LCD Screen	7" 800x480, Capacitive
Operation Mode	
Input	Touch buttons
Interface	
Alarm In	6
Alarm Out	1
RS485	1
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Memory Slot	Micro SD, Max 32G
Installation	Surface
Power	DC 12V, or supply directly by VTNS1060A
Power Consumption	Standby $\leq 1.5W$ , work $\leq 7W$
Working Temperature	-10°C~+55°C

## Kit



## Application

