

# XVR302-08U-IF



## Key Features


- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- Support audio over coaxial cable
- 8-channel BNC input
- Up to 8MP resolution for recording
- Support 1-ch HDMI output at up to 4K, 1-ch VGA output at up to 1920\*1080
- Long transmission distance over coaxial cable

## Specifications


Model	XVR302-08U-IF
Video/Audio Input	
Analog Video Input	8-ch, BNC
IP Video Input	8-ch (only IP up to 16ch), each channel up to 4K
Supported Analog Camera Types	<p><b>Support AHD input:</b></p> <ul style="list-style-type: none"> <li>8MP@15fps</li> <li>5MP@20fps</li> <li>4MP@30fps</li> <li>3MP@30fps</li> <li>1080P@30fps</li> <li>720P@60fps</li> </ul> <p><b>Support TVI input:</b></p> <ul style="list-style-type: none"> <li>8MP@15fps</li> <li>5MP@20ps</li> <li>4MP@30fps</li> <li>3MP@20fps</li> <li>1080P@30fps</li> <li>720P@60fps</li> </ul> <p><b>Support CVI input:</b></p> <ul style="list-style-type: none"> <li>8MP@15fps</li> <li>5MP@20fps</li> <li>4MP@30fps</li> <li>1080P@30fps</li> </ul>

	720P@60fps <b>Support CVBS input</b>
Audio Input	4-ch, RCA
Two-way Audio	1-ch, RCA
<b>Network</b>	
Incoming Bandwidth	80 Mbps
Outgoing Bandwidth	64 Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
<b>Video/Audio Output</b>	
CVBS Output	1-ch, BNC
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	4K(3840X2160)/30Hz,1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz,1024x768/60Hz
Audio Output	1-ch, RCA
Synchronous Playback	8-ch
<b>Encoding</b>	
Recording Frame Rate	<b>Main stream:</b> 8MP@8fps 5MP@12fps 4MP@15fps 3MP@18fps 2MP@25fps 720P@30fps <b>Sub stream:</b> D1@30fps (Max)
Recording Resolution	8MP/5MP/4MP/3MP/1080P/960P/720P/960H/4CIF/CIF
<b>Hard Disk</b>	
SATA	2 SATA interfaces
Capacity	up to 6TB for each HDD
<b>External Interface</b>	
Network Interface	1-J45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB3.0, Front panel: 1xUSB2.0
Serial Interface	1 x RS485
Alarm In	8
Alarm Out	4
<b>General</b>	
Power Supply	12V DC Power Consumption: ≤ 12 W without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions(W×D×H)	380mm ×318mm× 53.5mm (14.96" × 12.51"×2.1")
Weight (without HDD)	≤2.0 Kg (4.4lb)

## Dimensions

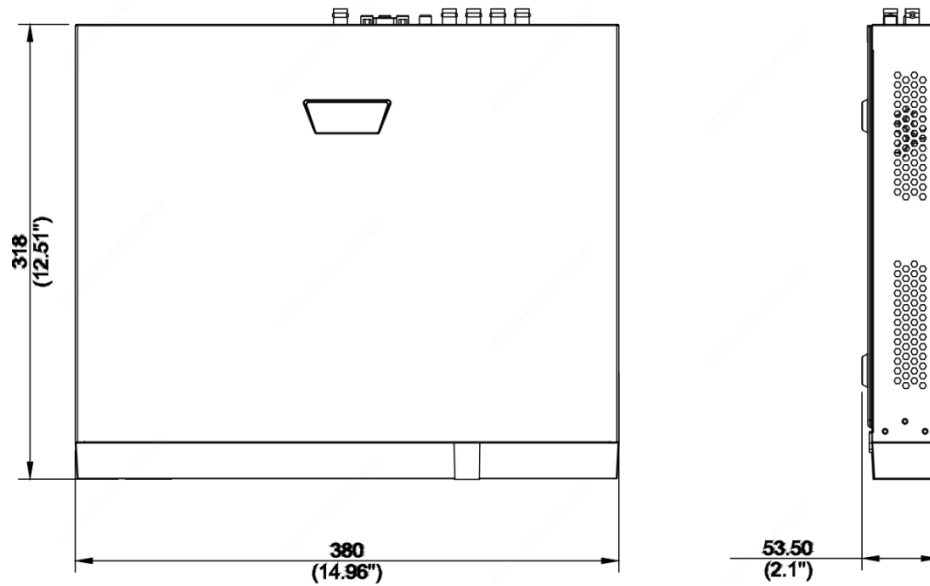

## Rear Panel

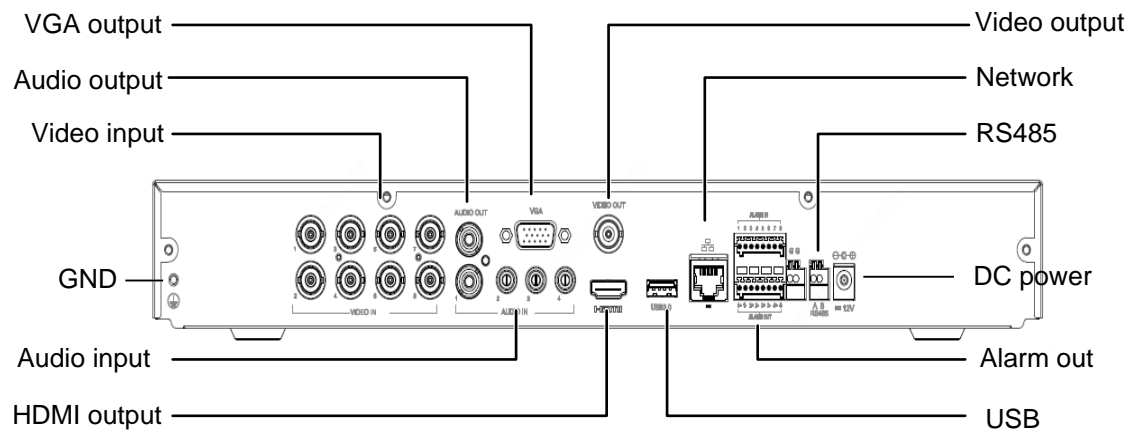

**Zhejiang Uniview Technologies Co., Ltd.**

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2020 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\* Product specifications and availability are subject to change without notice.